CALI® vinyl select & select XL



Installation Guide

Select and Select XL Collection and Accessories

Page 2

P.A.C.E. and Pre-Installation: Floating Click-Lock

Pages 3 - 7

Installation Guide: Floating Click-Lock

Pages 7 - 10

P.A.C.E. and Pre-Installation: Glue-Down

Pages 11 - 14

Installation Guide: Glue-Down

Pages 15 - 16

Flooring System



Wide+Click 7-1/8" Wide Plank Dims: 48" L x 7-1/8" W x 5.5mm H

Flooring Accessories




FLOATING CLICK-LOCK

INSTALL GUIDE

Floating Click-Lock Luxury Select and Select XL Plank Installation

Before you begin installation, remember to P.A.C.E. yourself with the checklist below. Full installation instructions and maintenance guidelines can also be found online at **CALIFLOORS.com**

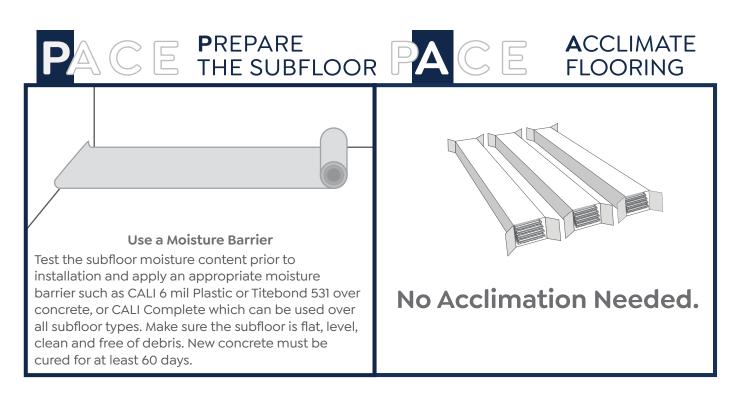



Vinyl flooring can be used in areas ranging from 0°F to 140°F.

Leave at least 1/4" expansion spaces between flooring and ALL vertical objects (walls, cabinets, pipes, etc.) Large flooring runs may require additional expansion space. Undercut door jambs and casings to provide adequate expansion space. Do not screw or nail cabinetry or other permanent fixtures to the flooring.

1/4" Expansion Gap

Floating Click-Lock Luxury Select and Select XL Plank Installation

Note: Flooring not used for its intended purpose will not be covered under warranty.

Whether you're a pro or DIY homeowner, installing vinyl plank flooring couldn't be easier. No power saws needed; Select and Select XL flooring scores and snaps with a simple utility knife. Fast and easy floating click-lock installation without all the sawdust and mess! Follow the simple guidelines below and see how easy it is to do it yourself.

- Upon ordering of Vinyl floor materials consider adding an additional 5% to allow for cutting waste and grading allowance.
- CALI® flooring is manufactured in accordance with accepted industry standards, which permit manufacturing, grading and natural deficiencies not to exceed 5%. If more than 5% of the material is unusable, do not install the flooring. Immediately contact the distributor/retailer from which the flooring was purchased. No claim will be accepted for materials with visible defects once they are installed. Installation of any material serves as acceptance of the material delivered.
- Installer/Owner assumes all responsibility to inspect all flooring before installation. Planks deemed unacceptable in appearance can be placed in closets, near walls or simply not be used. Pieces with glaring defects that can be seen from a standing position should be cut off or not be used as use constitutes acceptance.
- It is the responsibility of the installer/homeowner to determine if the job site conditions, environmental conditions and sub-floor are acceptable for the installation of CALI® Select and Select XL Plank flooring. Prior to installation, the installer/owner must determine that the jobsite meets or exceeds all applicable World Floor Covering Association Installation Guidelines. CALI does NOT warrant against failure resulting from or connected with subfloor, job site damage, or environmental deficiencies after installation. CALI makes no warranty or guarantee of the quality of the chosen installer's work or of a particular installation performed by him or her. CALI disclaims all liability for any errors or improprieties in the installation of its products by an installer.
- Floor noise is normal and will vary from one installation type to the next. Occasional noise is due to structural movement and may relate to sub-floor type, flatness, deflection, and/or related to the fasteners, changes in environmental conditions, relative humidity and the amount of topside pressure applied to the flooring. For these reasons floor noise is not considered a product or manufacturer defect.
- During installation, it is the installer's responsibility to document all jobsite conditions and measurements including the installation date, site relative humidity, temperature, and subfloor moisture content. For a complete list of points to address prior to installation, refer to ASTM F1482 21.
- When installing CALI Vinyl in bathrooms it is recommended to use appropriate expansion space around fixtures. Use a silicone based caulk to fill gaps and install a transition piece in all doorways.
- Do not install flooring under permanent or fixed cabinetry.
- · Never nail or screw anything through a FLOATED floor.

Transport, Storage, Acclimation

- Transport and store cartons in lay down, flat position.
- Stack boxes no more than 8 cartons (4ft.) high. Keep away from direct sunlight.
- Boxes should be stored in normal living conditions. If stored outside of normal living conditions (in areas of extreme heat or cold), the boxes should be brought to room temperature for a few days before installing.
- If not installing right away, flooring must be stored in a dry location on the pallet it was received on. We recommend covering with a tarp.
- Room temperature and relative humidity of install area must be consistent with year-round living conditions for at least 5 days prior to installation.
- Due to the nature of CALI Vinyl Select, acclimation is not needed. Installation can start immediately.

Pre-Installation Preparation

Prior to installation, inspect planks in daylight for visible faults/damage. Check if subfloor/site conditions comply with the specifications described in these instructions. If you are not satisfied do not install, and contact your supplier. CALI is not responsible for flooring that is installed with visible defects.

Recommended Tools

- Tape measure
- Pencil
- Chalk line
- 1/4" spacers
- Utility knifeRubber mallet
- Table Saw
- Rubber malle
- Double-sided prybar
- Miter saw
- Tapping block

Due to the nature of CALI Select and Select XL, it is acceptable to use the score and snap method for your end cuts. It is still recommended to use a table or miter saw for any rip cuts.

Subfloor Requirements General

- Floating floors can be laid on top of most hard surfaces (e.g. concrete, ceramics, wood)
- Soft subfloors (e.g. carpets) must be removed
- The subfloor must be level Flat to 3/16" per 10-foot radius
- The subfloor must be clean = Thoroughly swept and free of all debris
- The subfloor must be dry
- · The subfloor must be structurally sound

Acceptable Subfloor Types

- CD Exposure 1 plywood (grade stamped US PS1-95)
- OSB Exposure 1 subfloor panels
- · Underlayment grade particle board
- · Concrete slab
- Existing wood floors must be fastened to exisiting subfloors
- Ceramic tile (must fill in grout lines with a compatible patch compound)
- · Resilient tile and sheet vinyl

Acceptable Subfloor Thickness Requirements

Joist System Spacing (inches on center)	Minimum Thickness
12"	5/8"
12" to 16"	3/4"
16" to 19.2"	7/8"
19.3" to 24"	1-1/8"

Wood subfloors must be securely fastened. A best practice is to nail or screw every 6" along joists to avoid squeaking. If leveling is needed, sand down high spots and fill in low spots with a Portland based leveling compound.

Quick Tip! If your plywood, OSB or particle board subfloor is reading higher than 13% MC it is advised to find and correct the source of moisture intrusion before continuing installation. CALI is not responsible for any damage caused by moisture intrusion.

Concrete subfloors must be fully cured and at least 60 days old, preferably 90 days old. If leveling is needed, grind down high spots and level low spots with a Portland based leveling compound.

Ceramic Tile, resilient tile and sheet vinyl must be well-bonded to subfloor, in good condition, clean and level. We do not recommend sanding existing vinyl floors, as they may contain asbestos. We do recommend filling any grout lines or embossing with a compatible patch compound. Any damaged caused by skipping this step will not be covered by CALI.

Crawlspaces must have a minimum of a 6-mil polyethylene sheeting covering any exposed earth. Crawl spaces must have adequate ventilation and a minimum of 18" of air space between the ground and the floor joist.

Moisture Barriers and Underlayments

Even though CALI Vinyl Select and Select XL is waterproof it is NOT considered a moisture barrier. CALI always requires the use of a moisture barrier such as CALI 6 Mil Plastic, CALI Complete or Titebond 531 can also be used over concrete subfloors. Test the subfloor moisture prior to installation and apply an appropriate moisture barrier based on the subfloor moisture content.

Note: Moisture barriers are not required on subfloors above habitable spaces (2nd, 3rd stories, etc).

While moisture won't damage CALI Vinyl Select and Select XL, moisture intrusions from concrete hydrostatic pressure, flooding, or plumbing leaks, along with high levels of alkalinity, can affect the floor over time. Moisture can also be trapped below the flooring and create mold or mildew resulting in an unhealthy indoor environment. The installer, not CALI is responsible for making sure the concrete moisture and alkalinity are suitable prior to installing this floor. If using a moisture barrier or underlayment not sold by CALI, check with the manufacturer to ensure it is approved for use with the specified floor type. Underlayments over 2mm thick should not be used.

Note: Damage caused by using a moisture barrier not provided by CALI is not covered under warranty.

Radiant Heat Systems

CALI Vinyl flooring is only recommended for use over radiant heat systems if the special requirements specified by the radiant heat manufacturer's guidelines are met. Ensuring stable job site conditions, subfloor suitability, and proper acclimation are especially important when installing over a radiant heat system. It is the responsibility of the installer to ensure that the recommended environmental conditions are met for installation. Refer to your radiant heat system manufacturer to determine its compatibility with vinyl flooring, and to learn the specific requirements for installation. For more detailed information about radiant heat systems, visit the Radiant Heat Professionals Alliance (RPA) at www. radiantprofessionalalliance.org.

- Because of the wide variety of systems on the market (Hydronic, embedded in concrete, electrical wire/coil, heating film/mat) each with its own features and applications it is recommended that the user consult with the radiant heating provider for best practices, installation methods and proper subfloors. With Select and Select XL the floating installation method is the only method recommended for use with radiant heat systems.
- Radiant heat system must be turned on and in operation for at least 3 days before installation.
- The system must be turned down to 65°F and maintained 24 hours prior to installation.
- Once install is complete, turn system back on and slowly bring back up to normal operating temperature over a period 4-5 days.
- Floor should never be heated over 85°F. Consult with your radiant heating system manufacturer to successfully limit the maximum temperature.
- Always remember that rugs placed over radiant heated flooring can increase the surface temperature in that area by 3°- 5°F degrees.
- Relative Humidity must be maintained between 20-80%.
- When turning off the radiant heat system it must be turned down slowly at a rate of 1.5° degrees per day. You should never just turn the system off.
- CALI Vinyl flooring is only recommended for use over radiant heat systems if the special requirements specified by the radiant heat manufacturer's guidelines are met. Ensuring stable job site conditions, subfloor suitability, and proper acclimation are especially important when installing over a radiant heat system. It is the responsibility of the installer to ensure that the recommended environmental conditions are met for installation. Refer to your radiant heat system manufacturer to determine its compatibility with vinyl flooring, and to learn the specific requirements for installation. For more detailed information about radiant heat systems, visit the Radiant Heat Professionals Alliance (RPA) at www.radiantprofessionalalliance.org.

Installation of Select and Select XL® Flooring by CALI®: Drop Lock - Click Lock

Before laying: Measure the room at right angle to the direction of the planks. Planks in the final row should be at

least 1/3 the width of a plank. Due to this rule, planks in the first row can be cut to smaller size. Shuffle planks in order to obtain a pleasant blend of shades. Lay planks preferably following the direction of the main source of light. We recommend laying on wooden floors crossways to the existing floorboard. You should never nail or screw planks to the subfloor.

• Floor should be installed from several cartons at the same time to ensure good color, shade and appearance. CALI Vinyl Plank will have multiple plank variations.

Expansion gaps: Even though CALI Vinyl Plank will have very minimal expansion and contraction it is still required to leave 1/4" expansion space around the perimeter as well as all fixed objects (tile, fireplace, cabinets).

- If the installation area exceeds 80 feet in either direction transition pieces are needed.
- To cover your expansion space, CALI carries matching vinyl flooring moldings that include reducers, T-moldings, quarter rounds and thresholds. Matching stair treads may also be available.
- Baseboards and quarter round requires 1/16" of space between planks and trim to allow expansion and contraction of flooring.

Quick Tip! When installing around pipes, drill the hole 3/4" larger than the diameter of the pipes







Cutting boards using Score and Snap technique

Installing the First Two Rows:





1. Start with a plank cut at least 8" in length. (Cut the left side of the plank off, and save the excess for another row.) Starting from the left (when facing the wall), position the first board with the exposed lip facing you. Planks should be staggered in a brick-laid pattern for the first 2 rows to ensure proper engagement (see diagram A, plank 1). It is very important that this first row is installed straight and even.





2. Select a long, uncut plank (see diagram A, plank 2) and angle it down slightly to position in place. Use a tapping block to confirm the long side of the plank fits snugly with no gapping.

Quick Tip! Tapping blocks must be used gently, as excessive force can cause plank seams to peak.








Diagram A

For row three onwards, installation does not require alternating rows.

3. Select another long plank and backfill it into position 3 (see Diagram A). Use the rubber mallet to gently tap the butt end seams and secure the planks together. Butt end seams will be smooth to the touch when engaged properly and have no visible gaps. The long side of the plank should also fit snugly with no gapping.

Quick Tip! A rubber mallet must be used on the butt ends (short ends) to fully secure the planks. Failure to fully engage the flooring may result in gapping or misaligned planks.

4. Throughout the entire installation process, remember to check that your spacers are maintaining the ¼" expansion space along room perimeter or next to any fixed objects.

Installation of CALI Flooring


Next Steps:

1. Continue alternating planks on rows 1 and 2 to avoid misalignment. For row 3 onwards, installation does not require alternating rows. Install one row after another by angling down on the long side of the plank, sliding until the butt end seams are in contact, and then gently tapping all seams into place.

Quick Tip! Be sure to inspect the long and short edges of the plank for any gapping before moving on to the next plank. If you notice a gap, always reinstall the board to ensure a snug fit (see diagram on plank disassembling).

- 2. Install remaining boards and rows in the same manner. Use cut pieces at least 8" in length from previous rows as starter boards to reduce waste and avoid repeating patterns. Butt end seams should be staggered at least 8" between rows for optimum engagement of planks and overall appearance. This will help you avoid "H" joints.
- 3. Continue to use the rubber mallet and tapping block to ensure all seams are snug. Double check 1/4" expansion spaces throughout the installation process.





Rubber Mallet

Next Steps:

- 1. The last row may need to be cut lengthwise (ripped). Make sure ripped piece is at least 1/3 the size of the overall width of the plank.
- 2. Place the last row of boards to be fit on top of the last row of installed boards. Use a piece of plank or tile as a scribe to trace the contour of the wall.
- 3. Mark where the board will be cut. If the fit of the wall is simple and straight, simply measure for the correct fit and cut.
- 4. After boards are cut, position boards and tap all joints (long AND short ends) with the rubber mallet.



Disassembling

Separate the whole row by lifting up delicately at an angle. To separate the planks, leave them flat on the ground and slide them apart. If the planks do not separate easily you can slightly lift up the plank when sliding them apart. Do not lift up more than 5 degrees.

After Install/Floor Care Maintenance:

General Care:

- · For general cleaning, dry or damp mop as needed using Bona Stone Tile & Laminate Floor Cleaner or something similar.
- Never use a steam mop or wet-mop as standing water may cause permanent damage and the heat from the steam mop may dull the finish. The moisture from the dampened mop should evaporate off the floor quickly.
- Although CALI Vinyl flooring is waterproof, it is still a best practice to avoid excess moisture on the floor. Therefore, we recommend soaking up spills immediately using a dry towel or dry mop.
- · To clean up dried glue use either Bostik Ultimate Adhesive Remover or Titebond Adhesive Remover cleaning wipes.

Preventative Care:

- Vacuum or sweep the floor with a broom or dust mop on a regular basis or as needed to remove dirt, sand, or grit to protect the floor from scratches. Be careful of other debris such as small rocks and pebbles being drug across the floor.
- Do not use vacuums that use a beater bar or turn beater bar off; brush or felt vacuum heads are recommended as opposed to hard heads.
- · Keep pet nails trimmed to avoid excessive scratching.
- To prevent indentations and scratches, remove small diameter buttons/ends from furniture legs and replace with felt tipped non-staining floor protectors with a surface no less than 1" in diameter. Heavier objects may require wider floor protectors. Periodically check the felt tips for wear or buildup of grit/debris and replace as needed.
- Fit rolling furniture with soft rubber casters with a diameter of at least 2".
- When moving large appliances or furniture, use proper dollies, glides, or 1/8" Masonite with the shiny side down do not slide or drag across the floor. Rolling appliances across the floor or using heavy load bearing carts with small wheels may damage the vinyl floor.
- Use interior and exterior doormats at entrances to prevent dirt and moisture from being tracked onto the floor. Area rugs are also recommended in front of kitchen sinks and in high traffic areas. Rugs must be made of a breathable material to prevent moisture entrapment. We recommend using a breathable rug underlay; mesh or grid patterns are best. Do not use rugs with solid rubber or vinyl backings as this may damage the finish.
- · Limit direct sunlight on the floor by using curtains and blinds in areas that are exposed to high UV rays.
- Abrasive or harsh chemicals should not be used to clean the floor. Never use any of the following products on the floor: mineral spirits, paint thinner, acetone, ammonia-based cleaners, acrylic finishes, wax-based products, detergents, bleach, polishes, oil soap, abrasive cleaning soaps, or acidic materials such as vinegar. Never apply wax treatments to the floor.
- Heating units or non-insulated ductwork close to the flooring or subfloor may cause "hot spots" which must be eliminated prior to installation.
- · Heavy furniture (500+ lbs.) may obstruct the free, natural movement of a floated floor.
- · Do not install flooring under permanent or fixed cabinetry and never nail or screw anything through a floated floor.
- · Lighter colors and darker colors naturally show more dirt, flaws, and marks and are considered higher maintenance

GLUE-DOWN CLICK-LOCK

INSTALL GUIDE

Glue Down Luxury Select and Select XL Plank Installation


Before you begin installation, remember to P.A.C.E. yourself with the checklist below. Full installation instructions and maintenance guidelines can also be found online at **CALIFLOORS.com**



PREPARE THE SUBFLOOR PA




ACCLIMATE FLOORING



Required Adhesive will act as Moisture Barrier

Make sure the subfloor is flat, level, clean and free of debris. New concrete must be cured for at least 60 days. Test the subfloor moisture prior to installation and apply an appropriate moisture barrier on concrete subfloors or a vapor barrier on plywood. (Required adhesive will act as moisture/vapor barrier.)



No Acclimation Needed.



CONTROL ENVIRONMENT




EXPANSION GAPS





Vinyl flooring can be used in areas ranging from 0°F to 140°F.



Leave at least 1/4" expansion spaces between flooring and ALL vertical objects (walls, cabinets, pipes, etc.) Large flooring runs may require additional expansion space. Undercut door jambs and casings to provide adequate expansion space. Do not recommend screwing or nailing cabinetry or other permanent fixtures to the flooring.

Glue Down Luxury Select and Select XL Plank Installation

Note: Flooring not used for its intended purpose will not be covered under warranty.

Whether you're a pro or DIY homeowner, installing vinyl plank flooring couldn't be easier. No power saws needed; Select and Select XL flooring scores and snaps with a simple utility knife. Follow the simple guidelines below and see how easy it is to do it yourself.

- Upon ordering of Vinyl floor materials consider adding an additional 5% to allow for cutting waste and grading allowance.
- CALI® flooring is manufactured in accordance with accepted industry standards, which permit manufacturing, grading and natural deficiencies not to exceed 5%. If more than 5% of the material is unusable, do not install the flooring. Immediately contact the distributor/retailer from which the flooring was purchased. No claim will be accepted for materials with visible defects once they are installed. Installation of any material serves as acceptance of the material delivered.
- Installer/Owner assumes all responsibility to inspect all flooring before installation. Planks deemed unacceptable in appearance can be placed in closets, near walls or simply not be used. Pieces with glaring defects that can be seen from a standing position should be cut off or not be used as use constitutes acceptance.
- It is the responsibility of the installer/homeowner to determine if the job site conditions, environmental conditions and sub-floor are acceptable for the installation of CALI® Select and Select XL Plank flooring. Prior to installation, the installer/owner must determine that the jobsite meets or exceeds all applicable World Floor Covering Association Installation Guidelines. CALI® does NOT warrant against failure resulting from or connected with subfloor, job site damage, or environmental deficiencies after installation. CALI® makes no warranty or guarantee of the quality of the chosen installer's work or of a particular installation performed by him or her. CALI® disclaims all liability for any errors or improprieties in the installation of its products by an installer.
- Floor noise is normal and will vary from one installation type to the next. Occasional noise is due to structural movement and may relate to sub-floor type, flatness, deflection, and/or related to the fasteners, changes in environmental conditions, relative humidity and the amount of topside pressure applied to the flooring. For these reasons floor noise is not considered a product or manufacturer defect.
- During installation, it is the installer's responsibility to document all jobsite conditions and measurements including the installation date, site relative humidity, temperature, and subfloor moisture content. For a complete list of points to address prior to installation, refer to ASTM F1482 21.
- Do not install flooring under permanent or fixed cabinetry.

Transport, Storage, Acclimation

- Transport and store cartons in lay down, flat position.
- · Stack boxes no more than 8 cartons (4ft.) high. Keep away from direct sunlight
- Room temperature and relative humidity must be consistent with year-round living conditions for at least 5 days prior to installation.
- Due to the nature of CALI® Select and Select XL, acclimation is not needed. Installation can start immediately.

Pre-Installation Preparation

Prior to installation, inspect planks in daylight for visible faults/damage and color/print. Check if subfloor/site conditions comply with the specifications described in these instructions. If you are not satisfied do not install, and contact your supplier. CALI® is not responsible for flooring that is installed with visible defects or incorrect color/print.

Recommended Tools

- Tape measure
- · Chalk line
- · Utility knife
- Rubber mallet
- Miter saw
- 1/16" x 1/16" x 1/16" square notch trowel
- Pencil
- 1/4" spacers
- Table Saw
- · Double-sided prybar
- Tapping block

Due to the nature of CALI Select and Select XL, it is acceptable to use the score and snap method for your end cuts. It is still recommended to use a table or miter saw for any rip cuts.

Subfloor Requirements

General

- General Soft subfloors (e.g. carpets) must be removed
- The subfloor must be level Flat to 3/16" per 10-foot radius
- The subfloor must be clean = Thoroughly swept and free of all debris
- The subfloor must be dry
- · The subfloor must be structurally sound

Even though CALI Floors vinyl plank flooring is waterproof it is NOT considered a moisture barrier. Hence we always require the use of a moisture barrier on concrete. When using the glue down method for install, it is required to seal your concrete subfloor or use an appropriate adhesive with moisture protection.

Acceptable Subfloor Types

- CD Exposure 1 plywood (grade stamped US PS1-95)
- OSB Exposure 1 subfloor panels
- · Underlayment grade particle board
- Existing wood (must be sanded to its raw state)
- Concrete
- · Light weight concrete (may require a primer see Titebond manufacturer for details)
- · Ceramic tile (check with Titebond manufacture to see what prep will be needed: patch, self-lever, primer, etc.)

Acceptable Subfloor Thickness Requirements

Joist System Spacing (inches on center)	Minimum Thickness
12"	5/8"
12" to 16"	3/4"
16" to 19.2"	7/8"
19.3" to 24"1	1-1/8"

Glue Down Details

CALI® recommends the use of Titebond 675 when gluing Select and Select XL Pro. Make sure to follow all Titebond 675 quidelines which include but are not limited to:

- Plywood/OSB/Particle board subfloor moisture must not be over 13%
- Concrete Moisture should not read over 8lbs when using a Calcium Chloride test or 90% RH when using an in-situ probe or Lignomat SDM
- Concrete alkaline levels should not be more than 9.0 pH
- Use a 1/16" Square notch trowel
- For more details please visit Titebond's website.

http://www.titebond.com/product/flooring/62a57e94-6380-4de4-aa0e-45158d58160d

Wood subfloors must be securely fastened. A best practice is to nail or screw every 6" along joists to avoid squeaking. If leveling is needed, sand down high spots and fill in low spots with a Portland based leveling compound.

Quick Tip! If your plywood, OSB or particle board subfloor is reading higher than 13% MC it is advised to find and correct the source of moisture intrusion before continuing installation. CALI® is not responsible for any damage caused by moisture intrusion.

Concrete subfloors must be fully cured and at least 60 days old, preferably 90 days old. If leveling is needed, grind down high spots and level low spots with a Portland based leveling compound. Slabs on or below grade must be free of hydrostatic pressure.

Important: CALI® Vinyl Plank flooring is waterproof, however moisture intrusions from concrete hydrostatic pressure, flooding, or plumbing leaks, along with high levels of alkalinity, can affect the floor over time. Moisture can also be trapped below the flooring and create mold or mildew. The installer, not CALI® is responsible for making sure the concrete moisture and alkalinity are suitable prior to installing this floor.

Crawlspaces must have a minimum of a 6-mil polyethylene sheeting covering any exposed earth. Crawl spaces must have adequate ventilation and a minimum of 18" of air space between the ground and the floor joist.

Radiant Heat Systems

When glued down, Select and Select XL is not compatible for use with radiant heat systems.

Installation of Select and Select XL® Flooring by CALI®

Before laying: Measure the room at right angle to the direction of the planks. Planks in the final row should be at least 1/3 the width of a plank. Due to this rule, planks in the first row can be cut to smaller size. Shuffle planks in order to obtain a pleasant blend of shades. Lay planks preferably following the direction of the main source of light. We recommend laying on wooden floors crossways to the existing floorboard. You should never nail or screw planks to the subfloor.

• Floor should be installed from several cartons at the same time to ensure good color, shade and appearance. CALI® Vinyl Plank will have mutiple plank variations.

Expansion gaps: Even though CALI® Vinyl Plank will have very minimal expansion and contraction it is still required to leave 1/4" expansion space around the perimeter as well as all fixed objects (tile, fireplace, cabinets).

• To cover your expansion space, CALI® carries matching bamboo flooring moldings that include reducers, t-moldings, baseboards, quarter rounds, and thresholds. Matching stair parts are also available; including stair nosing, treads and risers. Please visit CALI®'s Flooring Accessories webpage.

Quick Tip! When installing around pipes, drill the hole 3/4" larger than the diameter of the pipes.

Installing the first row:

Measure the room at right angle to the direction of the planks. Planks in the final row should be at least 1/3 the width of a plank. Due to this rule, planks in the first row can be cut to smaller size. Shuffle planks in order to obtain a pleasant blend of shades. Lay planks preferably following the direction of the main source of light. We recommend laying on wooden floors crossways to the existing floorboard. You should never nail or screw planks to the subfloor.

- 1. Start out by pouring adhesive on to the subfloor. Make sure you do not pour out to much at one time. CALI® does not recommend spreading more than an arm's length (6 to 8 feet) worth of adhesive at a time. This will help to ensure the glue does not flash over before you can adhere the planks.
- 2. Use tapping block as necessary to fit planks together, but be careful not to let installed floor move on the wet adhesive while you are working. Repeat these steps as you move along with the installation.
- 3. Starting from the left (looking at the wall) with the tongue-side facing the wall, carefully place the first board in place, using spacers to leave a 1/4" expansion gap between wall and edges of the plank.
- 4. The end joints of the planks in the first row are assembled by overlapping the tongue side over the groove side of the previous plank insuring that the planks are perfectly aligned, with firm pressure, push the end joint downward till the end of the plank snaps in place. Install remaining full planks in the first row.
- 5. Cut the final board piece to length and install it in the same manner as the previous piece.

Next steps:

- 1. If the cut plank is at least 8" in length, it can be used as a starter piece in another row. If the cut plank is shorter than 8" do not use it. Instead, begin with a new board that is at least 8" in length and allows 8" between the end joints on the adjacent planks.
- 2. Position the first board in place by angling it up slightly, pushing forward and interlocking the side tongue. The long side of the plank should fit snug with no gapping.
- 3. Install the second plank of the second row. Position the long side of the plank with the tongue side, fully engage into the receiver of the first row of product. Lower the plank to the floor insuring that the end joint is overlapping and perfectly aligned, with firm pressure; push the end joint downward till the end of the plank snaps in place. Continue installing planks in the second row. It is important to make sure that the first two rows are straight and square as they can affect the entire installation
- 4. Carefully inspect the long edge and short ends of the plank for any gapping before moving on to the plank. If you notice a gap, STOP, and reinstall the board to ensure a snug fit.
- 5. Install the remaining boards and rows in the same manner.
- 6. Cut the last board to size.
- 7. Whenever practical, use cut pieces from previous rows as the starter board to reduce waste, however, it is a best practice when doing this to not create a repeating pattern. For a natural look rows and patterns should be staggered.
- 8. Maintain proper spacing (at least 8") between end joints for best appearance.

Installing the final row:

- 1. The last row may need to be cut lengthwise (ripped). Make sure ripped piece is at least 1/3 the size of the overall width of the plank.
- 2. Place the last row of boards to be fit on top of the last row of installed boards. Use a piece of plank or tile as a scribe to trace the contour of the wall.
- 3. Mark where the board will be cut. If the fit of the wall is simple and straight, simply measure for the correct fit and cut.
- 4. After boards are cut, position boards and tap all joints (long AND short ends) with the rubber mallet.

Disassembling

Separate the whole row by lifting up delicately at an angle. To separate the planks, leave them flat on the ground and slide them apart. If the planks do not separate easily you can slightly lift up the plank when sliding them apart. Do not lift up more than 5 degrees. (This can still be done but will become much more difficult and messy when gluing down.)

After Install/Floor Care Maintenance:

General Care:

- · For general cleaning, dry or damp mop as needed using Bona Stone Tile & Laminate Floor Cleaner or something similar.
- Never use a steam mop or wet-mop as standing water may cause permanent damage and the heat from the steam mop may dull the finish. The moisture from the dampened mop should evaporate off the floor quickly.
- Although CALI Vinyl flooring is waterproof, it is still a best practice to avoid excess moisture on the floor. Therefore, we recommend soaking up spills immediately using a dry towel or dry mop.
- To clean up dried glue use either Bostik Ultimate Adhesive Remover or Titebond Adhesive Remover cleaning wipes.

Preventative Care:

- Vacuum or sweep the floor with a broom or dust mop on a regular basis or as needed to remove dirt, sand, or grit to protect the floor from scratches. Be careful of other debris such as small rocks and pebbles being drug across the floor.
- Do not use vacuums that use a beater bar or turn beater bar off; brush or felt vacuum heads are recommended as opposed to hard heads.
- · Keep pet nails trimmed to avoid excessive scratching.
- To prevent indentations and scratches, remove small diameter buttons/ends from furniture legs and replace with felt tipped non-staining floor protectors with a surface no less than 1" in diameter. Heavier objects may require wider floor protectors. Periodically check the felt tips for wear or buildup of grit/debris and replace as needed.
- Fit rolling furniture with soft rubber casters with a diameter of at least 2".
- When moving large appliances or furniture, use proper dollies, glides, or 1/8" Masonite with the shiny side down do not slide or drag across the floor. Rolling appliances across the floor or using heavy load bearing carts with small wheels may damage the vinyl floor.
- Use interior and exterior doormats at entrances to prevent dirt and moisture from being tracked onto the floor. Area rugs are also recommended in front of kitchen sinks and in high traffic areas. Rugs must be made of a breathable material to prevent moisture entrapment. We recommend using a breathable rug underlay; mesh or grid patterns are best. Do not use rugs with solid rubber or vinyl backings as this may damage the finish.
- · Limit direct sunlight on the floor by using curtains and blinds in areas that are exposed to high UV rays.
- Abrasive or harsh chemicals should not be used to clean the floor. Never use any of the following products on the floor:
 mineral spirits, paint thinner, acetone, ammonia-based cleaners, acrylic finishes, wax-based products, detergents,
 bleach, polishes, oil soap, abrasive cleaning soaps, or acidic materials such as vinegar. Never apply wax treatments to
 the floor.
- Heating units or non-insulated ductwork close to the flooring or subfloor may cause "hot spots" which must be eliminated prior to installation.
- · Heavy furniture (500+ lbs.) may obstruct the free, natural movement of a floated floor.
- · Do not install flooring under permanent or fixed cabinetry and never nail or screw anything through a floated floor.
- · Lighter colors and darker colors naturally show more dirt, flaws, and marks and are considered higher maintenance